


**Generator set**  
**Sound-proof type**  
**GMS200CS**

## **SPECIFICATIONS**



## 1 Standards & Conditions

### Design Standards

The designs and the productions are in conformity with:

- Conformite Europeenne (CE)
- ISO8528-5:2005
- GB/T2820.5-2009

### Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 45°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 80%.
- Altitude: Below one thousand (1000) meters above sea Level.

### Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

### Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


## 2 General Features

- Cummins engine 6CTAA8.3-G2
- Close coupled to LSA alternator LSA44.3VL14
- Microprocessor control module PLC-920
- Main circuit breaker: 320A
- Rotate speed governor: EFC
- Excitation system: Self excited
- A.V.R model: R250
- Key switch
- Emergency stop switch
- ATS (automatic transfer switch) receptacle
- 2x12V sealed for life maintenance free battery

- Lockable battery isolator switch
- Powder coated canopy
- 50°C radiator
- Oil pump on the engine
- Steel base frame with forklift slots
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Base fuel tank for 9 hours running
- Drain points for fuel tank
- Operation Manual / Parts List/ Specifications

## 3 Equipment Specification


### General technical data

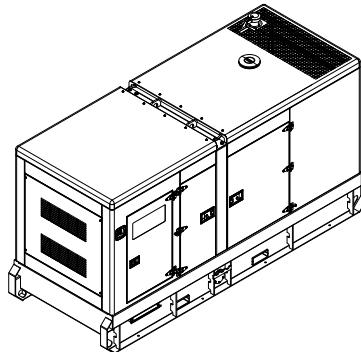

Model.....	GMS200CS
Structure type .....	R
Tank capacity.....	420L
Dry weight.....	2693kg
Noise level @7m .....	74.3dBA
Dimensions L×W×H.....	3588×1322×1840mm
Standby Power .....	220kVA/176kW
Prime Power .....	200kVA/160kW


Voltage	380V	400V	415V		
Ampere	303.9A	288.7A	278.2A		
<b>Genset Fuel Consumption</b>					
Frequency/Load	25%	50%	75%	100%	110%
50Hz (L/h)	13	23	34	45	51

## Diesel Engine

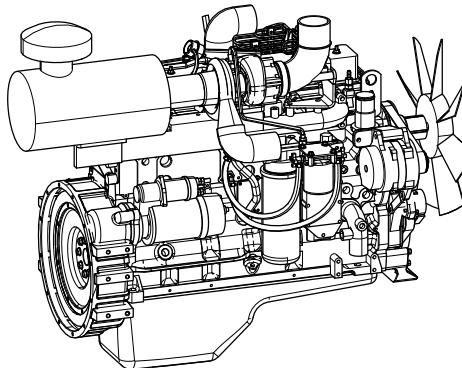


Engine Manufacturer/Brand.....	Cummins
Engine Model.....	6CTAA8.3G2
Dimensions L×W×H.....	N/A
Dry Weigh (approx.) .....	702kg
Number of Cylinders.....	6
Bore .....	114mm
Stroke .....	135mm
Displacement.....	8.3L
Compression Ratio.....	N/A
Type of injection.....	Direct injection
Intake System.....	Turbocharged,water-to-air charge cooled
Intake Resistance.....	$\leq 6.28\text{kPa}$
Cooling System .....	Water cooled
Fan .....	Pusher
Battery Voltage .....	12/24V
Type of Fuel.....	Diesel
Type of Oil .....	ACEA E2, API CF, CF-4, CG-4
Oil Capacity .....	18.9L
Type of Coolant .....	Glycol mixture
Coolant Capacity .....	45.3L
Back Pressure .....	$\leq 10.1\text{kPa}$
Standby Power .....	203kW
Continuous Power .....	183kW
Fuel Consumption(100%load).....	205g/kW.h

## Alternator

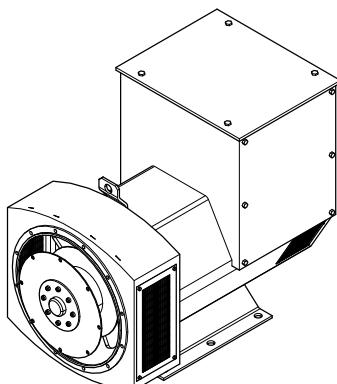

Alternator Manufacturer/Brand .....	LSA
Alternator Model .....	LSA44.3VL14
Exciter.....	Brushless
Cooling Fan .....	Cast alloy aluminum
Windings.....	100% copper
Insulation Class .....	H
Winding Pitch.....	.2/3
Terminals .....	12
Drip Proof .....	IP23
Altitude.....	$\leq 1000\text{m}$
Overspeed .....	2250rpm
Air Flow.....	0.514m <sup>3</sup> /s(50Hz),0.617m <sup>3</sup> /s(60Hz)
Voltage Regulation .....	$\pm 1.0\%$
Total Harmonic TGH / THCat no load < 1.5 % - on load < 5%	
Telephone Interference.....	THF<2%;TIF<50

## PLC-920 Control System

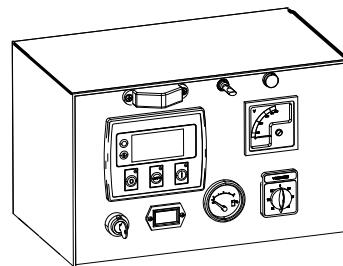


PLC-920 is an advanced control module based on micro-processor designed to control the engine via a key switch and push buttons on the front panel. The module is used to start and stop the engine and indicate fault conditions, automatically shutting down the engine and giving a true up fault condition of an engine failure.


### Standard Control Function

- Manual Engine Control Module
- Low Oil Pressure
- High Engine Temperature
- Auxiliary Shutdown
- Overspeed Protection
- Protection hold-off timer
- Charge Failure warning

## 4 Overall Dimensions

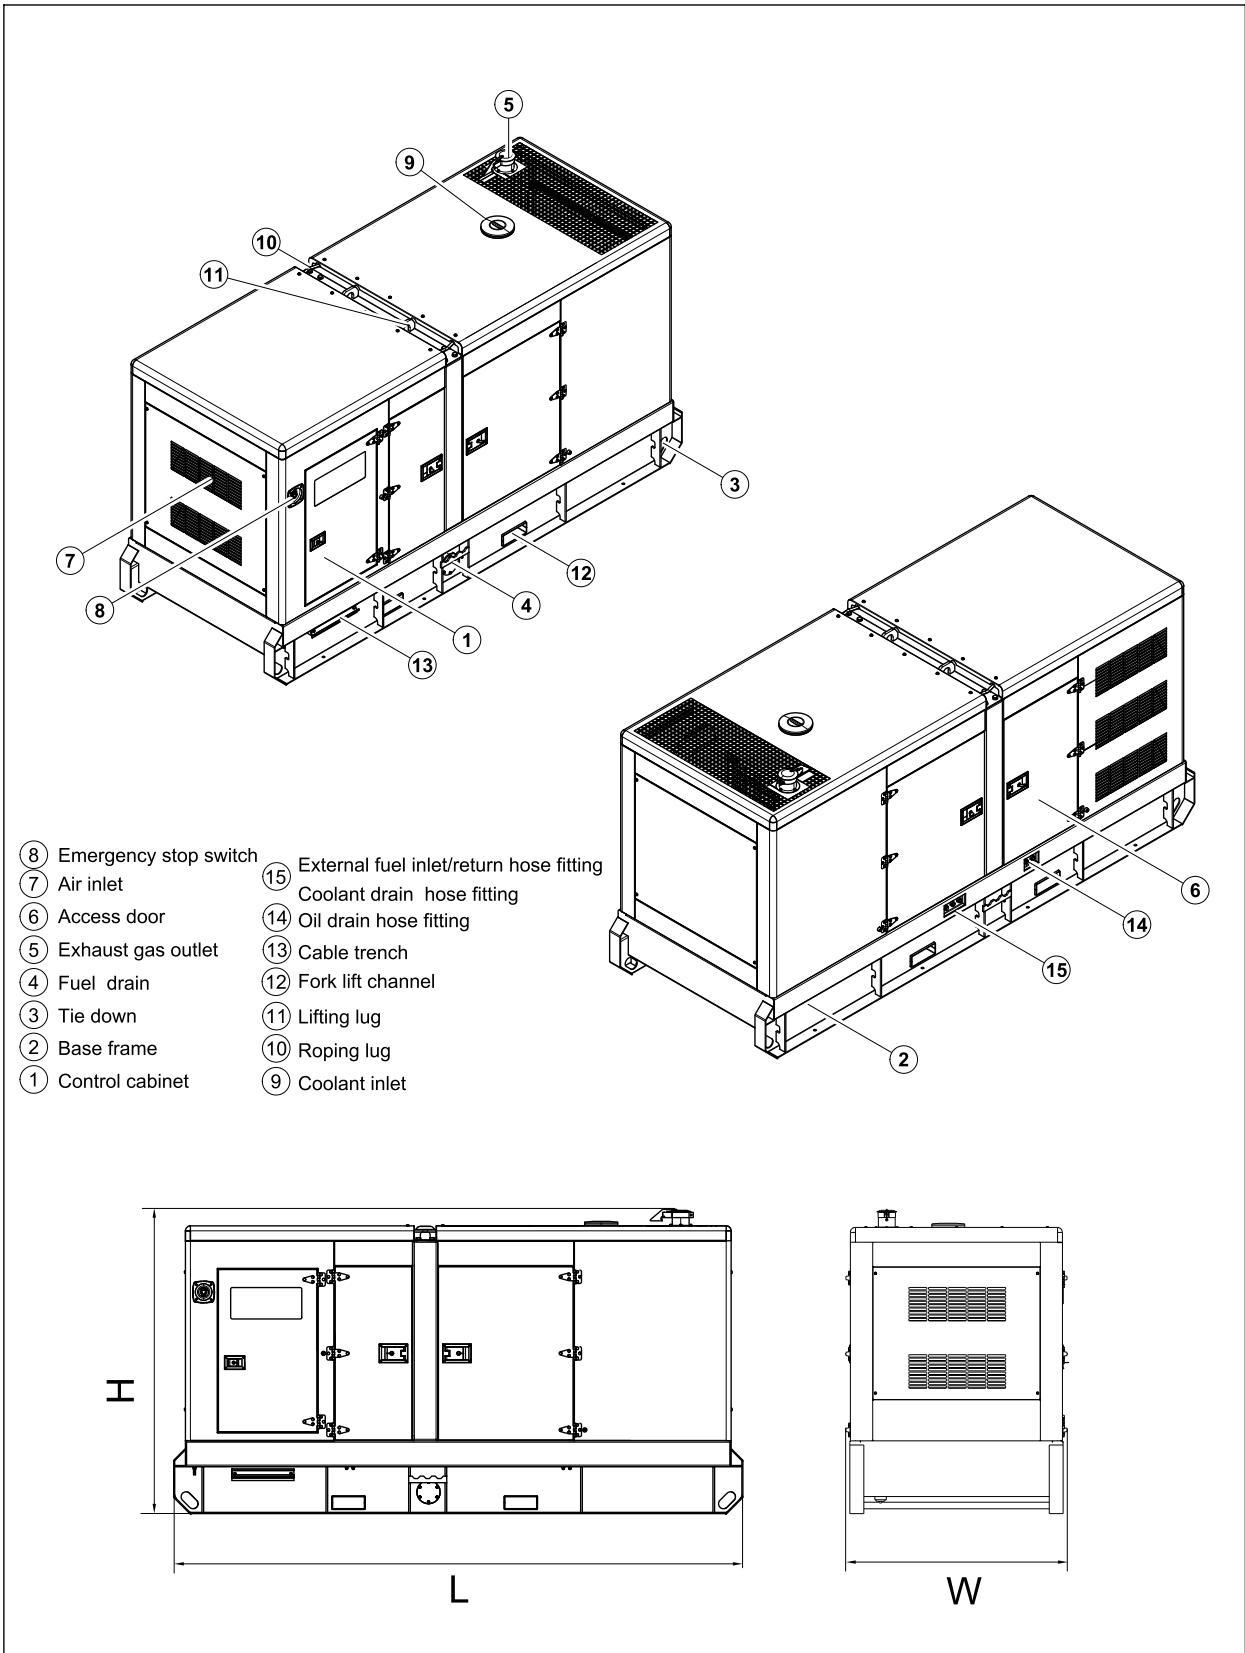


## 5 Control System

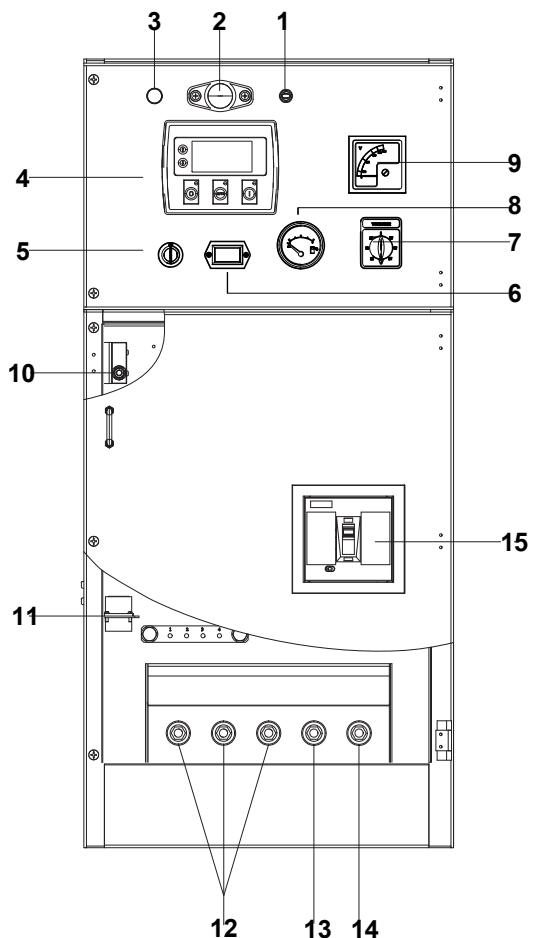

**Control & field wiring cabinet**

Ref.	Description
1	Control cabinet lamp switch
2	Control cabinet lamp
3	Charge indicator
4	Control module
5	Key switch
6	Time counter
7	Voltage changer-over switch
8	Fuel level meter
9	Voltage meter
10	Limit switch
11	Mains input/Remote control/ATS connector
12	Live wire terminal
13	Neutral wire terminal
14	Ground wire terminal
15	Main circuit breaker

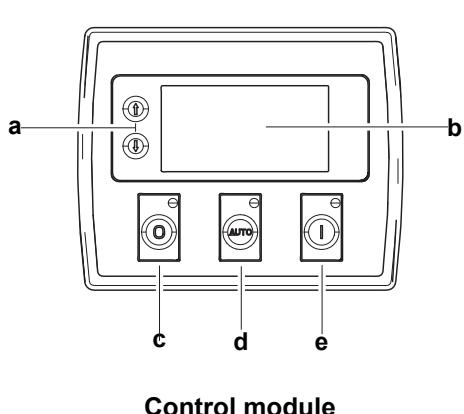

Ref.	Description
a	Navigation button» Accept (Configuration mode only)
b	Main status display
c	Stop/reset button» Next page (Configuration mode only)
d	Auto start button» Decrease value/next item (Configuration mode only)
e	Start button» Increase value/next item (Configuration mode only)

1000029548-A2-E
08.2023

<http://www.powerlinkgenset.com>  
E-mail: info@powerlinkgenset.com

*Specification may change without prior notice. For more info.,  
contact Power Link or your local distributors please.*