

Generator set

Containerized type

WCS3760S

SPECIFICATIONS



1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- Conformance Européenne (CE)
- ISO8528-5:2005
- GB/T2820.5-2009

Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 80%.
- Altitude: Below one thousand (1000) meters above sea Level.

Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


2 General Features

- Cummins engine QSK95-G4
- Close coupled to Stamford alternator LVSI 804W
- Microprocessor control module PLC-7420
- ABB main circuit breaker: 5000A
- RCQ
- Rotate speed governor: ECM
- Excitation system: PMG
- A.V.R : FULL WAVE RECTIFIED
- Key switch
- Emergency stop switch
- Mains input/remote communication connector
- Fuel adding device
- ATS (automatic transfer switch) receptacle
- 4x12V/200AH sealed for life maintenance free battery

- Lockable battery isolator switch
- Powder coated canopy
- Container
- 50°C radiator
- Fire extinguisher
- Oil pump on the engine
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Fuel tank with 4 hours running
- Drain points for fuel tank
- Fuel-water separator for fuel tank
- Operation Manual / Specification

3 Equipment Specification


General technical data

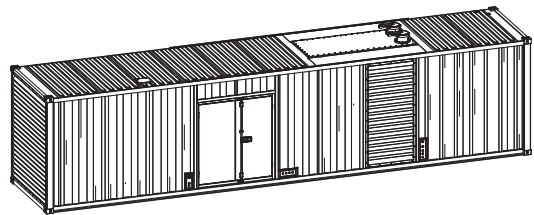

Model..... WCS3760S
 Structure type C
 Tank capacity..... 2400L
 Dry weight..... 27500kg
 Noise level @7m 85.0dBA
 Dimensions L×W×H..... 12192x2438x2896mm
 Standby Power 3465kVA/2772kW
 Prime Power 3300kVA/2640kW


Genset Electrical Parameters					
Voltage	380V	400V	415V	440V	
Ampere	5014A	4763A	4591A	4330A	
Genset Fuel Consumption					
Frequency/Load	25%	50%	75%	100%	110%
50Hz (L/h)	189	333	483	645	731

Diesel engine

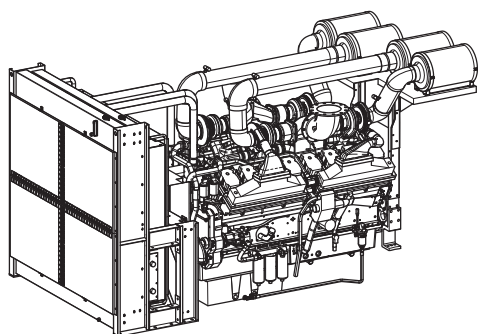


Engine Manufacturer/Brand	Cummins
Engine Model	QSK95G4
Dimensions L×W×H.....	6135×2368×2530mm
Dry Weigh (approx.)	14500Kg
Number of Cylinders	16
Bore	190mm
Stroke	210mm
Displacement.....	95.3L
Compression Ratio	15.5
Fuel system.....	Modular Common Rail System
Intake System.....	Turbocharged
Intake Resistance	≤7.0kPa
Cooling System	Water cooled
Fan	Pusher
Battery Voltage	24V
Type of Fuel.....	No. 2 diesel or ASTM D2
Type of Oil	15W40 to API CG4
Oil Capacity	647L
Type of Coolant	Glycol mixture
Coolant Capacity	380L
Back Pressure	≤6.8kPa
Standby Power	3246kW
Prime Power	2884kW
Fuel Consumption(100%load).....	645L/h

Alternator

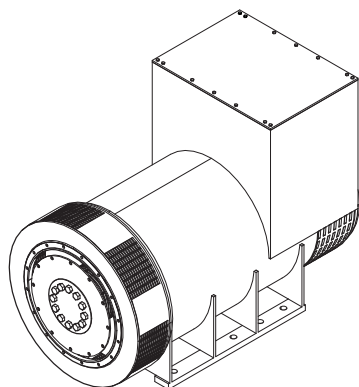

Alternator Manufacturer/Brand	Stamford
Alternator Model	LVSI 804W
Exciter.....	Brushless
Cooling Fan	Cast alloy aluminum
Windings.....	100% copper
Insulation Class	H
Winding Pitch.....	2/3
Terminals	6
Drip Proof	IP23
Altitude.....	≤1000m
Overspeed	2250rpm
Air Flow.....	2.69m³/s(50HZ),3.45m³/s(60HZ)
Voltage Regulation	±1.0%
Total harmonic TGH / THCat no load < 1.5 % - on load < 5%	
Telephone Interference.....	THF<2%;TIF<50


PLC-7420 Control System

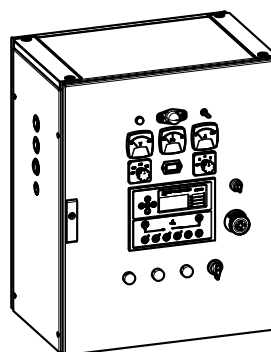



PLC-7420 is an advanced control module based on micro-processor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, and automatically start the engine when the mains is abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol


4 Overall Dimensions

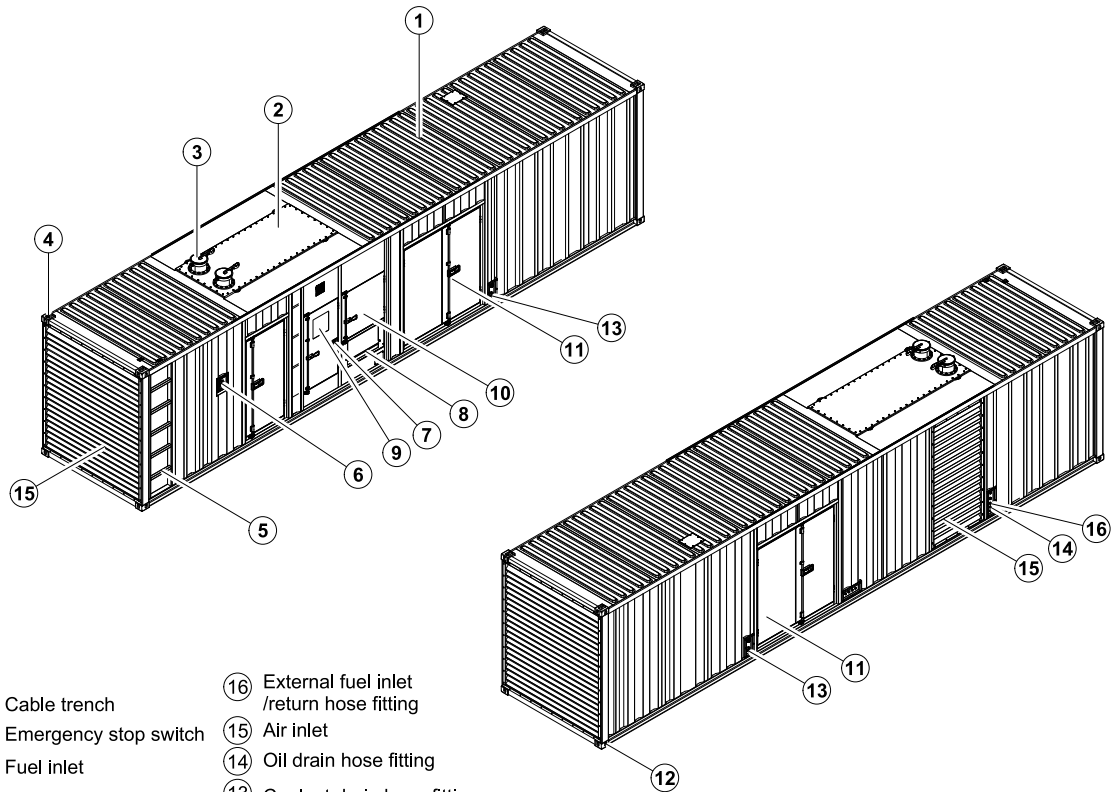


- | | |
|-------------------------|--|
| ⑧ Cable trench | ⑬ Coolant drain hose fitting |
| ⑦ Emergency stop switch | ⑭ Oil drain hose fitting |
| ⑥ Fuel inlet | ⑮ Air inlet |
| ⑤ Ladder | ⑯ External fuel inlet /return hose fitting |
| ④ Lifting lug | |
| ③ Exhaust gas outlet | |
| ② Muffler | |
| ① Canopy | |

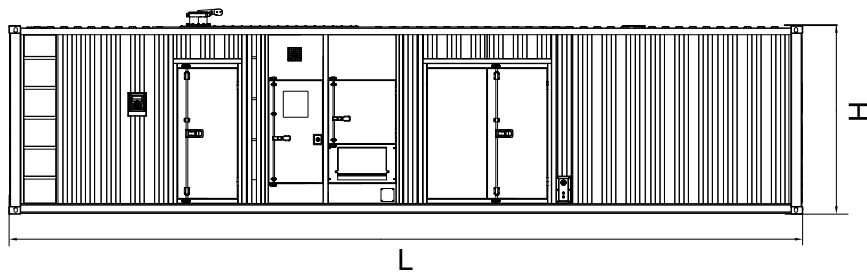


5 Control System

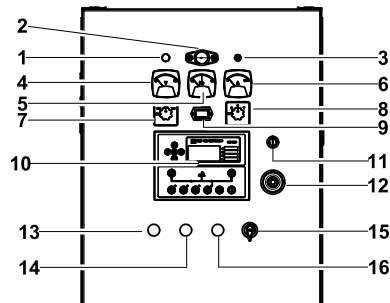

Control cabinet

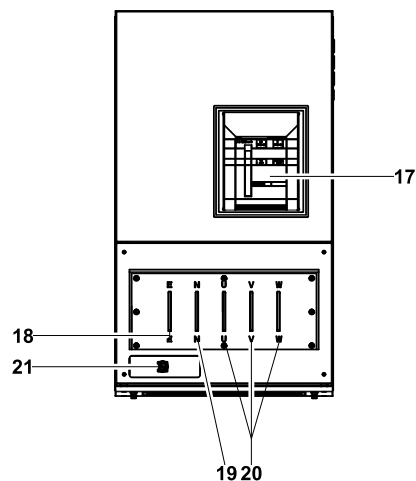

Field wiring cabinet

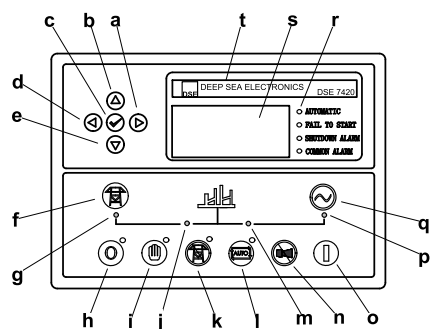

Control module

Ref.	Description
1	Charge indicator
2	Control cabinet lamp
3	Control cabinet lamp switch
4	Voltage meter
5	Frequency meter
6	Current meter
7	Changerover switch-Voltage
8	Changerover switch-Current
9	Time counter
10	Control module
11	Key switch
12	Emergency stop switch
13	Fuel leak indicator
14	Running button with indicator
15	Oil drain switch
16	Stop button with indicator
17	Main circuit breaker
18	Ground wire terminal
19	Neutral wire terminal
20	Live wire terminals
21	Mains input/Remote control/ ATS communication connector

a	Button (next page)
b	Button (increase value / previous item)
c	Button (accept)
d	Button (previous page)
e	Button (decrease value / next item)
f	Button (transfer the load to the mains supply, when in Manual mode only)
g	Mains supply available LED
h	Stop / Reset button
i	Manual button (Manual control mode)
j	Mains supply on load LED
k	Test button (Test mode)
l	Auto button (Auto mode)
m	Genset on load LED
n	Mute/Lamp test button
o	Start button (Manual)
p	Genset available LED
q	Button (transfer the load to the genset, when in Manual mode only)
r	Alarm LED (4 alarm items)
s	LCD display
t	Control module name

1000031047-A2-E
03.2023