


Mobile light tower

ALT2000-KAC

SPECIFICATIONS



Mobile Light Tower ALT2000-KAC, Tier 4F



1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- GB T 1883.1-2005
- JB8891-1999
- GB252-2011
- GB20891-2014
- GB4208-2008
- VSB 1 Rev 4 June 1999
- AS3000: 2018
- AS3010: 2017

Design Conditions

- Installation place: outdoors.
- Ambient temperature: -15°C to 50°C. The coolant heater is needed when the temperature is below 0°C
- Humidity: Less than 90%.
- Altitude: Less than one thousand (1000) meters above sea Level.

Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


2 General Features

- Kubota engine Z482-E4B-ACP-1
- Close coupled to PowerLink alternator PL0BS
- Microprocessor control module PLC-805
- Governor type : Electronic control
- Three masts with hydraulic extension and manual rotation
- Hydraulic power unit
- Hydraulic cylinder with explosion-proof valve
- 4x500W metal LED lamps
- 1x12V/72AH sealed for life maintenance free battery(supply for engine)
- Emergency stop switch
- Lockable battery isolator switch
- Powder coated canopy
- Vibration isolators between the engine/alternator and base frame
- Dry type air cleaner
- Fuel tank(250 running hours under full load)
- Fuel drain outlet
- Operation Manual / Specification


3 Equipment Specification

Model.....	ALT2000-KAC
Light type.....	LED
Luminous flux(Max)lm.....	240000
Light intensity(Max)cd.....	256324
Tank capacity.....	190L
Wet weigh.....	1485kg
Dry weigh.....	1330kg
Total lighting wattage.....	4x500W
Tire size.....	245/75 R16 *2
Dimensions (Fully retracted).....	4950x1960x2300mm
Dimensions (Fully extended).....	4950x2570x9000mm
Three masts with manual rotation.....	144°
Tilting Angle of Light Fixture rotation.....	90°
Maximun towing speed.....	80km/h
Maximun wind speed rating.....	102km/h
Sound pressure level @7m.....	53dB(A)
Fully extended/retracted time.....	50/50s
Hydraulic oil type.....	L-HM46
Hydraulic oil tank capacity.....	3.8L
Rated output.....	3.0kW
Voltage/Frequency.....	AC 240V/50Hz

Light Tower Fuel Consumption		
Number of running lamp	2xLamps	4xLamps
Fuel Consumption(L/h)	0.48	0.76

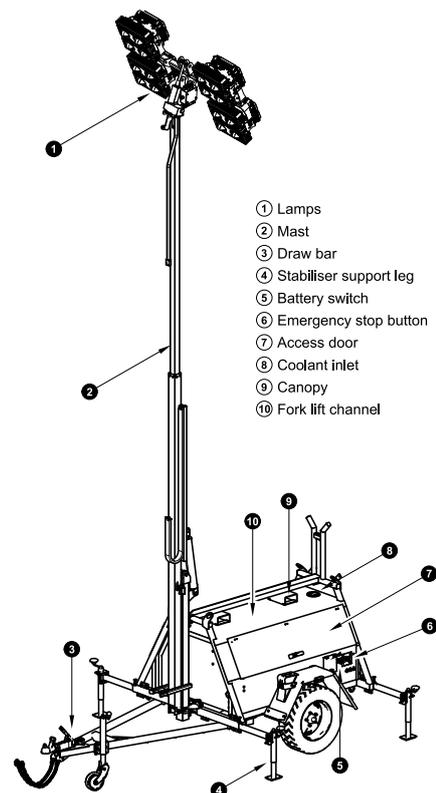


Engine

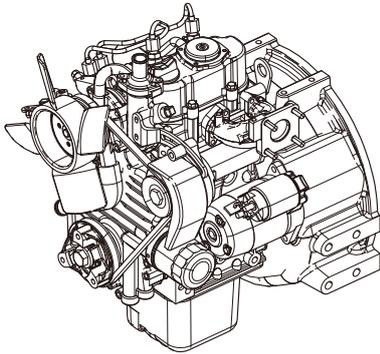

Engine Manufacturer/Brand.....	KUBOTA
Engine Model.....	Z482-E4B-ACP-1
Dimensions L×W×H.....	487.9×412×564.2mm
Dry Weigh (approx.)	80Kg
Number of Cylinders.....	2
Bore.....	67mm
Stroke.....	68mm
Displacement.....	0.479L
Compression Ratio.....	23.5
Type of Injection.....	Spherical Type (E-TVCS)
Intake System.....	Natural aspirated
Intake Resistance.....	≤2.45kPa
Cooling System	Water cooled
Fan	Pusher
Battery Voltage	12V
Type of Fuel.....	No.2-D (ASTMD975)
Type of Oil	API -CH
Oil Capacity	2.5L
Type of Coolant	Glycol mixture
Back Pressure.....	9.33kPa
Speed	1800rpm
Prime Power.....	4.6kW


Alternator



Alternator Manufacturer/Brand.....	POWERLINK
------------------------------------	-----------

Alternator Model	PL0BS
Exciter.....	Brushless
Cooling Fan	Cast alloy aluminum
Windings.....	100% copper
Insulation Class	H
Winding Pitch.....	2/3
Terminals	12
Drip Proof	IP23
Altitude.....	≤1000m
Overspeed	2250rpm
Air Flow.....	5.3m³/min(50Hz),5.8m³/min(60Hz)
Voltage Regulation	±1.0%
Total harmonic TGH / THCat no load < 1.5 % - on load < 5%	
Telephone Interference.....	THF<2%;TIF<45


PLC-805 Control System

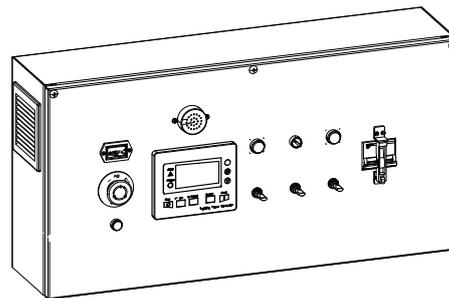


PLC-805 is an advanced control module based on microprocessor, apply to AC/DC light tower. The controller is equipped with a powerful graphic display showing icons, symbols and bar graphs for intuitive operation. Accurately measure various operational parameters and display all values and alarms information on the LCD.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of light tower
- Indicating operation status, fault conditions, all parameters and alarms
- Manual, automatic and remote work mode selectable
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Overall power output display
- Real time clock for time and date display, overall runtime display, 99 log entries
- Communication with PC via RS485 interface, using MODBUS protocol

5 Overall Dimension

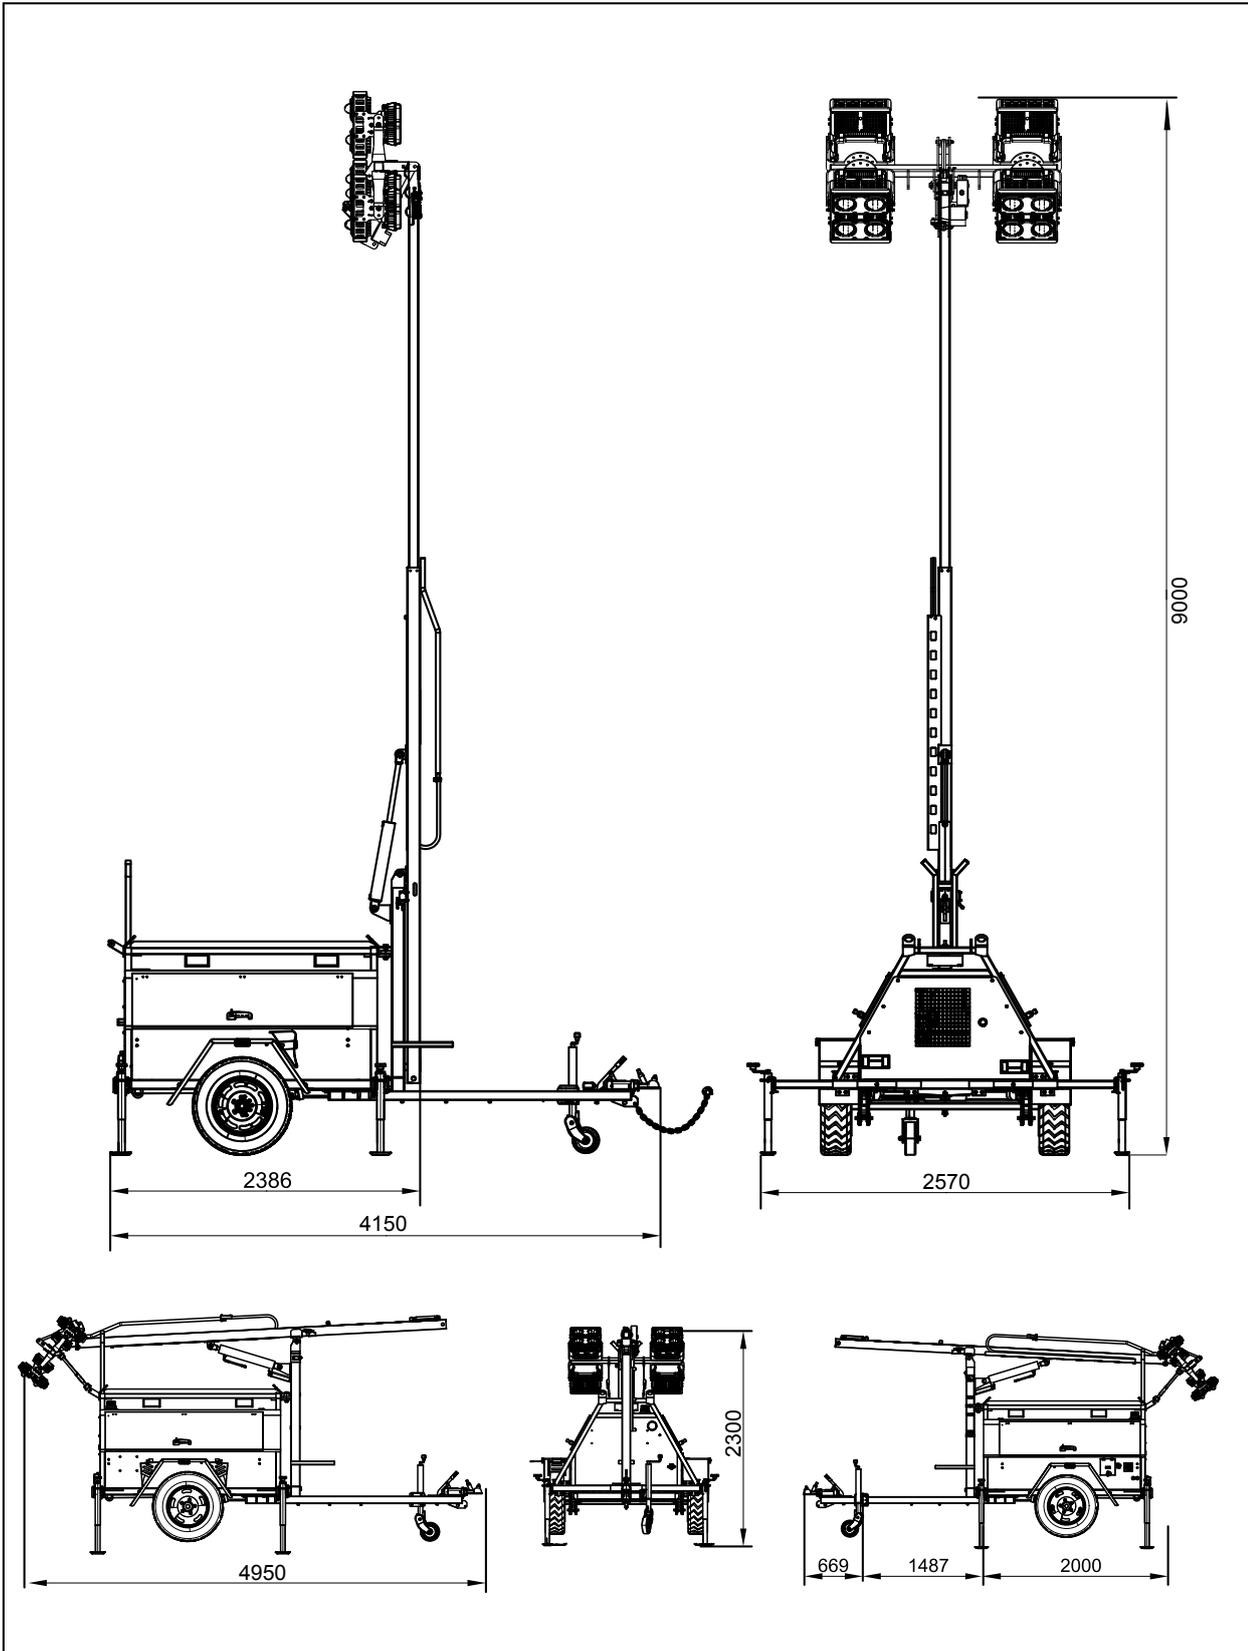


6 Control System

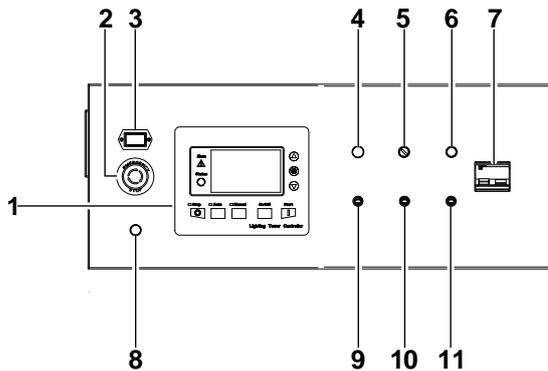

Control cabinet & Switch cabinet

Ref.	Description
1	Control module
2	Emergency stop button
3	Time counter
4	Horizontal indicator
5	Alarm light switch
6	Confirm switch
7	Main circuit breaker
8	Dead man switch
9	Mast tilting switch
10	Mast up/down switch
11	Lamp tilting switch

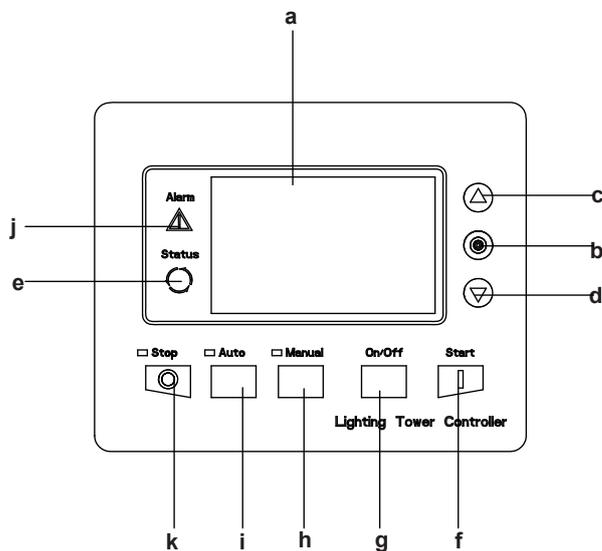

Control module

Ref.	Description
a	Main status display
b	Cyclic selection of the display mode (MEASUREMENT->ADJUSTEMENT)
c	Select the set point, select the screen or increase set point value
d	Select the set point, select the screen or decrease set point value
e	Status Indicator
f	Start of the engine in maunal mode
g	Light On/Off
h	Maunal mode
i	Auto mode
j	Alarm indicator
k	Stop of the engine/Alram reset button

1000035573-C2-E

07.2022

<http://www.powerlinkworld.com>

*Specification may change without prior notice. For more info.,
contact Power Link or your local distributors please.*