


**Generator set**

**Containerized type**

**HVC1275S**

# **SPECIFICATIONS**



# HV series HVC1275S

50 Hz @ 1500rpm, 3300V



## 1 Standards & Conditions

### Design Standards

The designs and the productions are in conformity with:

- Conformance Européenne (CE)
- ISO8528-5:2005
- GB/T2820.5-2009

### Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 80%.
- Altitude: Below one thousand (1000) meters.

### Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

### Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


## 2 General Features

- Cummins engine KTA50-G3
- Close coupled to Leroy Somer alternator LSA52.2L45
- Microprocessor control module PLC-500
- HV Switchgear Panel: ABB 630A
- PT Cabinet
- DC Power Cabinet
- Rotate speed governor: Electrical governor
- Excitation System: AREP
- A.V.R. Model: R448
- Key switch
- Emergency stop switch

- 4x12V/150AH sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder coated canopy
- 50°C radiator
- Fire extinguisher
- Heat exchanger
- Coolant heater
- Oil pump on the engine
- Steel base frame with forklifts
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Fuel tank for 6 hours running
- Drain points for fuel tank
- Fuel inlet pump and its control box for the fuel tank
- Added fuel-water separator for fuel tank
- Operation Manual / Specifications

## 3 Equipment Specification


### General technical data

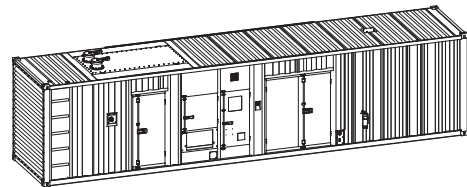

Model.....	HVC1275S
Structure type .....	C
Fuel tank.....	1450L
Dry weight.....	15843kg
Noise level @7m .....	79dBA
Dimensions L×W×H.....	12192x2438x3153mm
Standby Power .....	1400kVA/1120kW
Prime Power.....	1275kVA/1020kW
Voltage/Ampere .....	3300V/223A


Genset Fuel Consumption					
Frequency/Load	25%	50%	75%	100%	110%
50Hz (L/h)	76	139	199	261	293

## Diesel Engine

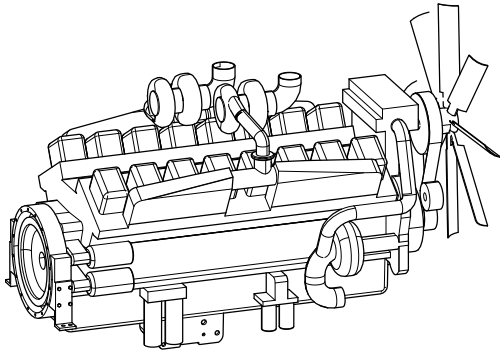


Engine Manufacturer/Brand.....	Cummins
Engine Model.....	KTA50-G3
Dimensions L×W×H.....	2885x1519x2005mm
Dry Weigh (approx.) .....	5058kg
Number of Cylinders.....	16
Bore.....	159mm
Stroke .....	159mm
Displacement.....	50.3L
Compression Ratio .....	13.9
Type of injection.....	Direct injection
Intake System.....	Turbocharged and aftercooled
Intake Resistance .....	6.23kPa
Cooling System .....	Water cooled
Fan .....	Push
Battery Voltage .....	24V
Type of Fuel.....	NO.2 or ASTMD975
Type of Oil .....	CF4/SG15W-40
Oil Capacity .....	177L
Type of Coolant .....	Glycol mixture
Coolant Capacity engine only.....	161L
Back Pressure .....	≤10kPa
Standby Power .....	1227kW
Prime Power .....	1097kW

## HV Alternator

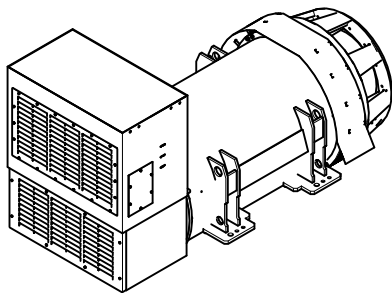

Alternator Manufacturer/Brand .....	Leroy Somer
Alternator Model .....	LSA52.2L45
Exciter.....	Brushless
Cooling Fan .....	Cast alloy aluminum
Windings.....	100% copper
Insulation Class .....	H
Winding Pitch.....	2/3
Terminals .....	6
Drip Proof .....	IP23
Altitude.....	≤1000m
Overspeed .....	2250rpm
Air Flow.....	2.5m³/s
Voltage Regulation .....	±0.5%
Total harmonic TGH / THC .....	< 3.5%
Telephone Interference.....	FHT<2%;TIF<50


## PLC-500 Control System




PLC-500 is a microprocessor based control unit containing all necessary functions for protection of the genset and the breaker control. Furthermore, it contains all necessary three-phase measuring circuits and presents all values and alarms on the LCD display. The module has the function of load sharing which enables the module to share the active load (kW) equally when operating in parallel with other gensets. The load sharing is performed so each genset takes a portion of the load that is calculated in percent according to the nominal power.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- RS232 & RS485 can be used at the same time
- Real time clock for time and date display, overall runtime display, 250 log entries


## 4 Overall Dimensions

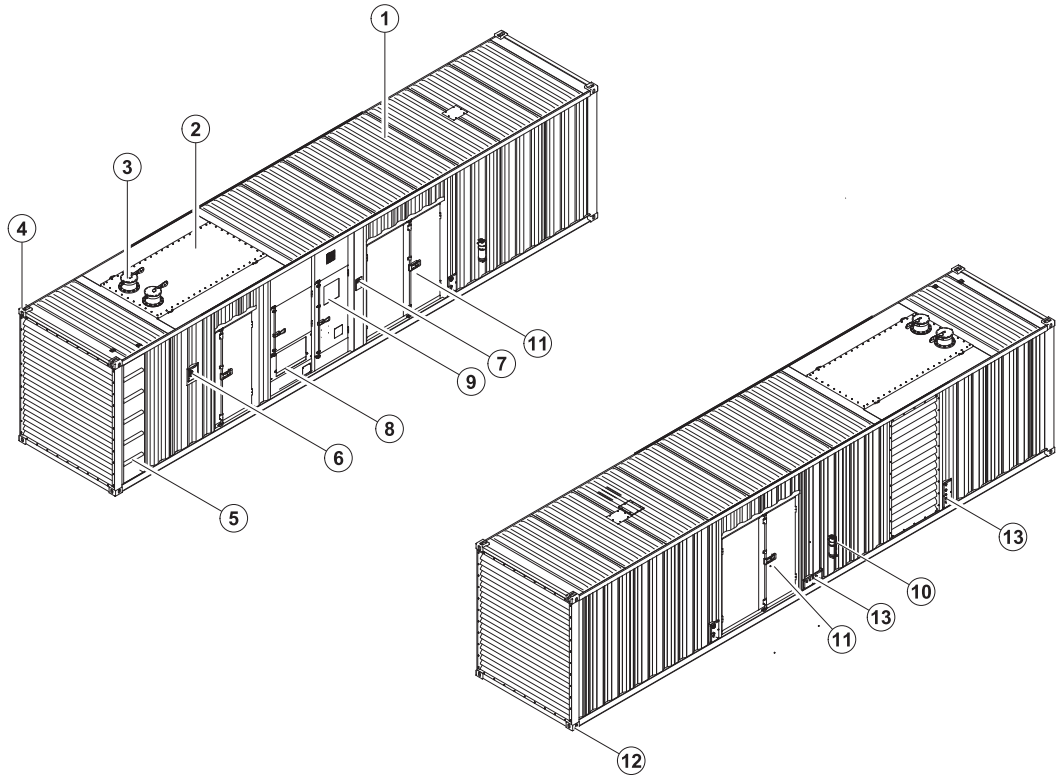

- |                         |   |
|-------------------------|---|
| ⑦ Emergency stop switch | ⑬ External fuel inlet/return hose fitting |
| ⑥ Fuel inlet            | ⑬ Coolant/Oil drain hose fitting          |
| ⑤ Ladder                | ⑫ Fixing lug                              |
| ④ Lifting lug           | ⑪ Access door                             |
| ③ Exhaust gas outlet    | ⑩ Fire extinguisher                       |
| ② Muffer                | ⑨ Control cabinet                         |
| ① Canopy                | ⑧ Cable trench                            |

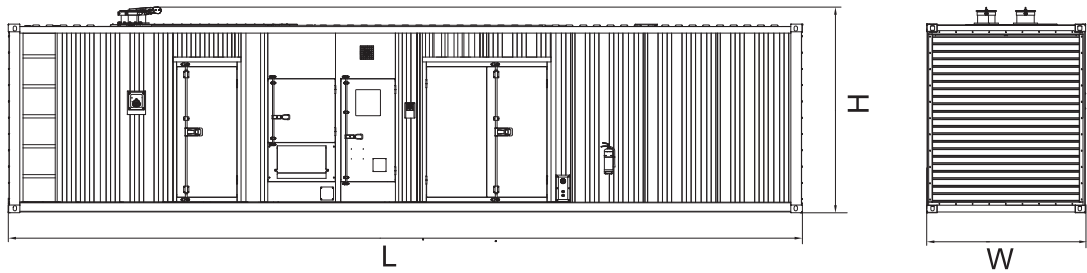

## 5 Switchgear Panel

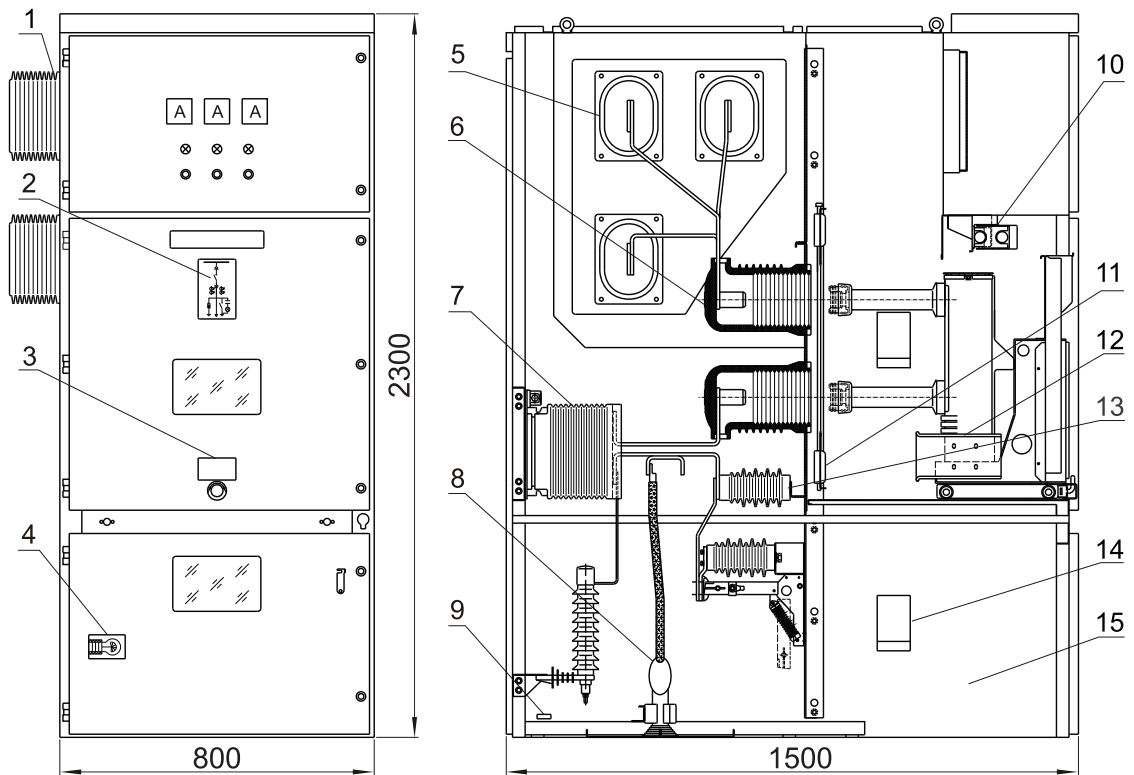

1. Passing bushing    2. Primary diagram    3. Nameplate    4. Lighting lamp    5. Main bus  
6. Contact box    7. CT    8. Incoming cable    9. Earthing bus bar    10. Secondary interlocking device  
11. Valve mechanism    12. CB trolley    13. Insulator    14. Heater    15. Frame

1000032040-A2-E
-----------------

02.2020
---------

<http://www.powerlinkworld.com>

*Specification may change without prior notice. For more info.,  
contact Power Link or your local distributors please.*